


QUICK INSTALLATION GUIDE

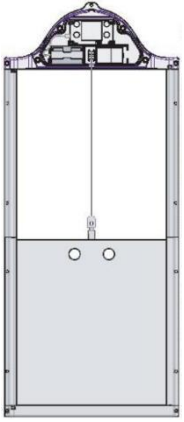

1) Connect the cable connector of the battery set of the device with the cable connector of the solar panel


2) **CAUTION:**

Make sure that the pop up door runs smoothly up/down along the side guides .

REMINDER : Keep the button pressed until the cursor of the display shifts to another position. The “bip” tone alone is not enough



3) Keep the button  pressed for 5 seconds to turn the display on

4) Select the desired language and confirm by pressing the button 



5) **SELECT DATE AND TIME**

A - Enter date and time

B - Select the desired time of opening

C - Select the desired time of closing


D - Confirm your selection by pressing the button 



6) **SELECT OPEN/CLOSE MENU**

For the setting of the opening and closing of the pop up door

Please make sure that the setting procedure is started with the pop up door completely shut


A - Push the button with the arrow up 

Maintain 3 to 5 cm distance between the highest position and the upper edge of the pop up door.

B - Hold on for **5 seconds** before setting the closing of the pop up door with the same procedure.

C - Now the calibration of the door is accomplished .

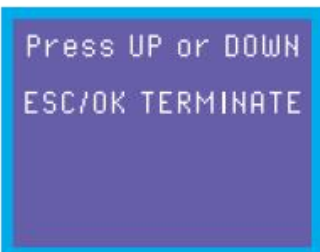

D - Confirm your settings by pressing the button 





7) SELECT MODE MENU

A - MANUAL MODE

The pop up door is either lifted up by pressing the button  or closed by pressing 

B - AUTOMATIC LIGHT MODE


Automatic functioning according to the illuminance value (LUX) set in the LIGHT MODE

C - AUTOMATIC TIME MODE

Automatic functioning according to the desired opening and closing time settings

D - AUTOMATIC LIGHT+TIME MODE


Automatic functioning according to the time or light intensity settings

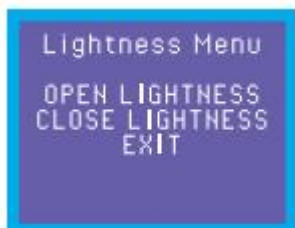

8) SELECT LIGHTNESS MENU

Setting of the morning and evening light intensity. For both the opening and closing of the pop up door we recommend to set your device at 20 Lumens (LUX).



9) In the every day the display will always appear as idle to preserve the battery charge. Press  to turn the display on and proceed with the desired settings.

FURTHER DETAILS ARE AVAILABLE IN THE ENCLOSED SETTING GUIDE
AND VIDEOS AT WWW.CUCCILOTTA.COM